




Octagonal Pole Curved Arm with Flange Mounted


Technical Specification

APPLICATION


Street lighting column with curved or radial arm has many applications ranging from main roads, residential suburbs, commercial developments, parking areas, pathways and more.




J-BOLT




I-BOLT
(3M-5M)




FLANGE PLATE
(F) THK




SECTION A-A




EARTHING LUG

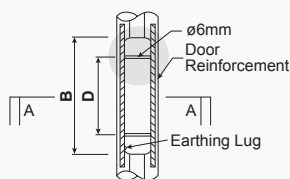

SERVICE DOOR
DETAIL



SERVICE DOOR
SIDE VIEW

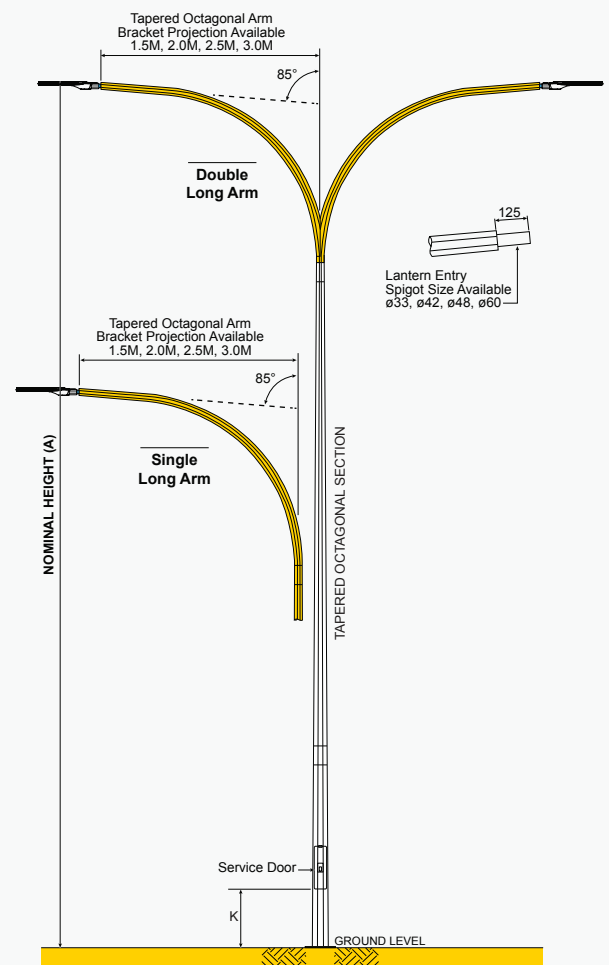

* Option

- Fiber Service Door : 490mm (H) x 185mm (W)

NOMINAL HEIGHT (A)	B	C	D	E x (F) THK.	G x H x I	J	GRD. LVL. to SRVC. DOOR (K)
6M	450mm	100mm	300mm	300 x 12mm	220 x 26 x 53mm	ø20 x 450(L) mm	305mm
7M	450mm	100mm	300mm	300 x 12mm	220 x 26 x 53mm	ø20 x 450(L) mm	305mm
8M	450mm	120mm	300mm	300 x 12mm	220 x 26 x 53mm	ø20 x 450(L) mm	305mm
9M	450mm	120mm	300mm	300 x 15mm	220 x 26 x 53mm	ø20 x 450(L) mm	610/1850mm
10M	450mm	120mm	300mm	350 x 16mm	260 x 30 x 62mm	ø24 x 570(L) mm	610/1850mm
12M	450mm	120mm	300mm	400 x 18mm	300 x 30 x 67mm	ø24 x 570(L) mm	610/1850mm