🕂 Vízona





Octagonal Pole Post - Top Column - In Ground Mounted

Technical Specification

APPLICATION

Compound lighting pole or post-top column is suitable for a variety of secondary lighting applications such as pedestrian walkways, car parks, recreational compounds and many others. The pole suits all types of fittings ranging from globe to customized decorative lantern. Options for polyester coating to enhance aesthetic appearance.

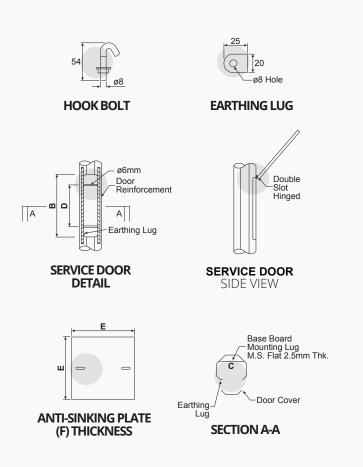

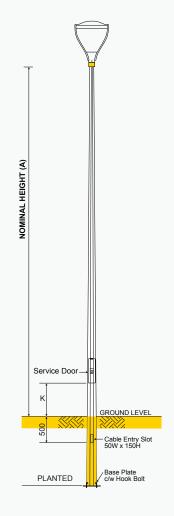

* Option

- Fiber Service Door : 490mm (H) x 185mm (W)

NOMINAL HEIGHT (A)	В	с	D	E X (F) THK.	GRD. LVL. to SRVC. DOOR (K)	PLANTING DEPTH (L)
3M	350mm	90mm	150mm	300 x 2.5mm	305m	0.6M
3.5M	350mm	90mm	150mm	300 x 2.5mm	305m	0.8M
4M	350mm	90mm	150mm	300 x 2.5mm	305m	0.8M
4.5M	350mm	90mm	150mm	300 x 2.5mm	305m	0.8M
5M	350mm	90mm	150mm	300 x 2.5mm	305m	0.8M