




# Octagonal Pole

## Curved Arm – In Ground Mounted


### Technical Specification

#### APPLICATION


Street lighting column with curved or radial arm has many applications ranging from main roads, residential suburbs, commercial developments, parking areas, pathways and more.




**HOOK BOLT**




**EARTHING LUG**

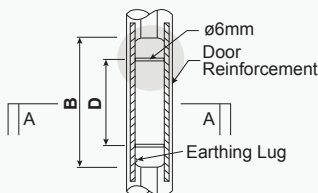


**SERVICE DOOR  
DETAIL**

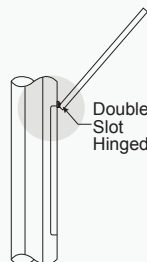


**SERVICE DOOR  
SIDE VIEW**



**ANTI-SINKING PLATE  
(F) THICKNESS**



**SECTION A-A**

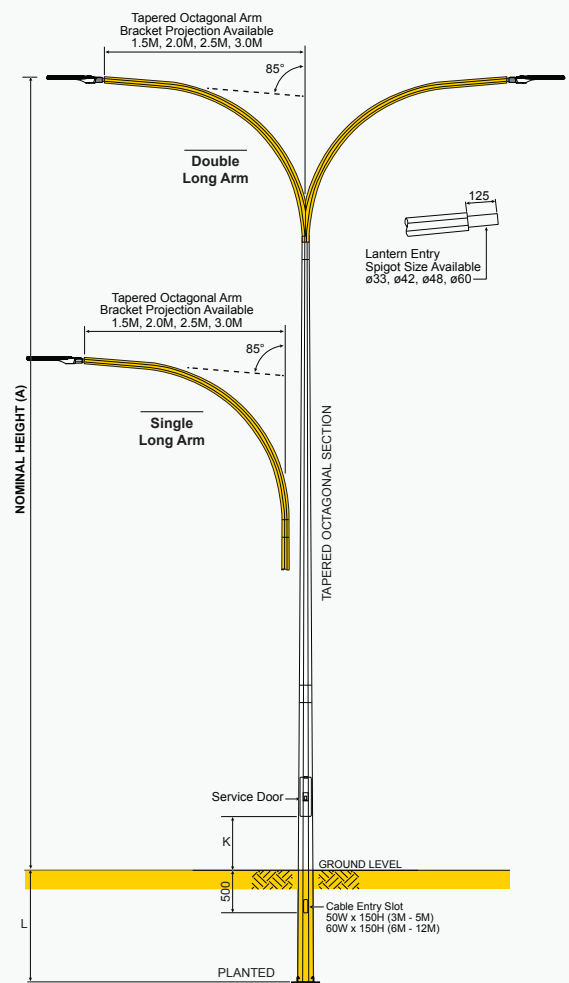

\* Option

- Fiber Service Door : 490mm (H) x 185mm (W)

NOMINAL HEIGHT (A)	B	C	D	E x (F) THK.	GRD. LVL. to SRVC. DOOR (K)	PLANTING DEPTH (L)
6M	450mm	100mm	300mm	300 x 2.5mm	305mm	1.2M
7M	450mm	100mm	300mm	300 x 2.5mm	305mm	1.2M
8M	450mm	120mm	300mm	300 x 2.5mm	305mm	1.3M
9M	450mm	120mm	300mm	300 x 2.5mm	610/1850mm	1.4M
10M	450mm	120mm	300mm	350 x 2.5mm	610/1850mm	1.5M
12M	450mm	120mm	300mm	400 x 2.5mm	610/1850mm	1.7M