




Octagonal Pole Spigot Arm - In Ground Mounted

Technical Specification


APPLICATION

Street lighting column with spigot arm has many applications ranging from main roads, residential suburbs, commercial developments, parking areas, pathways and more.

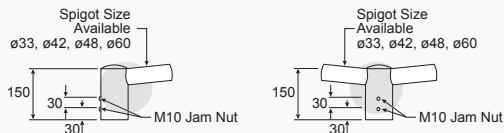


SINGLE SHORT ARM


DOUBLE SHORT ARM




HOOK BOLT




EARTHING LUG

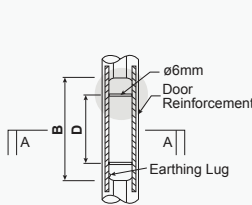


SERVICE DOOR DETAIL




SERVICE DOOR SIDE VIEW



ANTI-SINKING PLATE (F) THICKNESS



SECTION A-A

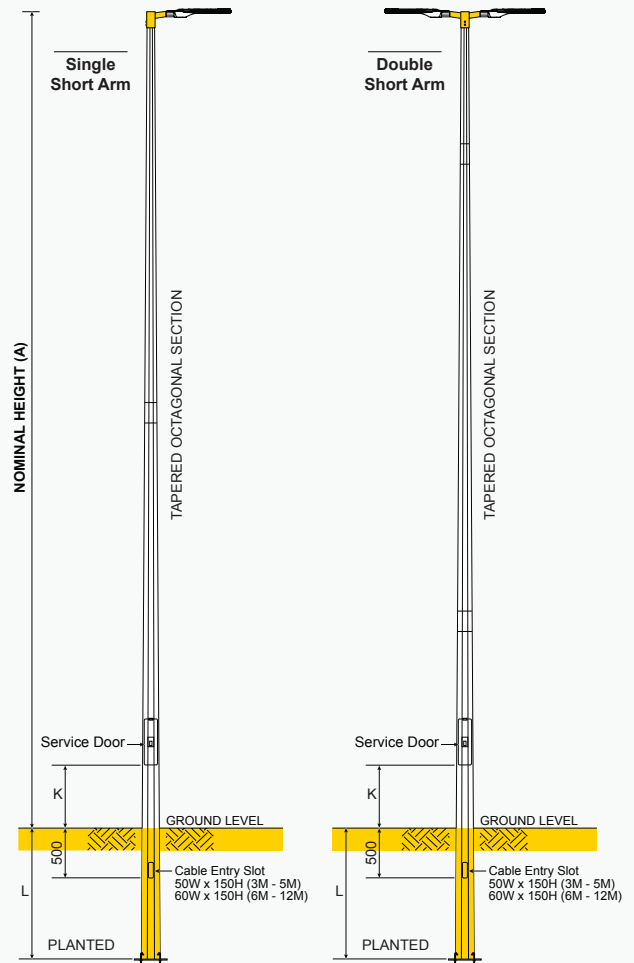

* Option
- Fiber Service Door : 490mm (H) x 185mm (W)

NOMINAL HEIGHT (A)	B	C	D	E X (F) THK.	GRD. LVL. to SRVC. DOOR (K)	PLANTING DEPTH (L)
3M	350mm	90mm	150mm	300 x 2.5mm	305mm	0.6M
4M	350mm	90mm	150mm	300 x 2.5mm	305mm	0.8M
5M	350mm	90mm	150mm	300 x 2.5mm	305mm	0.8M
6M	450mm	100 mm	300mm	300 x 2.5mm	305mm	1.2M
7M	450mm	100mm	300mm	300 x 2.5mm	305mm	1.2M
8M	450mm	120mm	300mm	300 x 2.5mm	305mm	1.3M
9M	450mm	120mm	300mm	300 x 2.5mm	610/1850mm	1.4M
10M	450mm	120mm	300mm	400 x 2.5mm	610/1850mm	1.5M
12M	450mm	120mm	300mm	400 x 2.5mm	610/1850mm	1.7M