



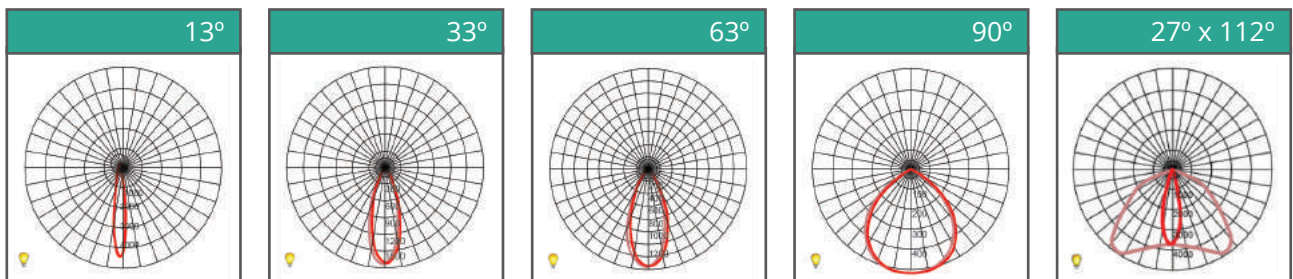

Blazor XSPL180 & XSPL240


- Lumen Maintenance: L90 @ 70,000 hours
- Working Temperature: -25°C – 50°C
- Storage Temperature: -25°C – 80°C
- Power Factor: >0.95 at Full Load
- THD: <20% at Full Load
- Material: Casting Materials Pressure Casted Aluminum (Powder Coat Finished)

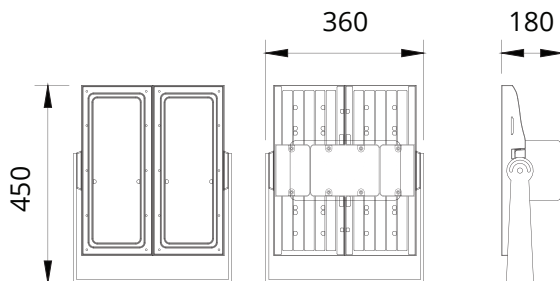

LED								
Type								
Watts	180W				240W			
CCT	3500K	4000K	5000K	6000K	3500K	4000K	5000K	6000K
Efficacy	134 lm/w	140 lm/w	142 lm/w	142 lm/w	123 lm/w	128 lm/w	130 lm/w	132 lm/w
Lumen	24120 lm	25200 lm	25560 lm	25560 lm	29590 lm	30720 lm	31200 lm	31680 lm
Input Current	0.78A				1.04A			
Ingress Protection	IP66				IP66			
Impact Protection	IK09				IK09			
Weight	10.5kg				10.5kg			
Working Temperature	-25°C ~ 50°C				-25°C ~ 50°C			

Mounting & Construction

Lamp Mounting

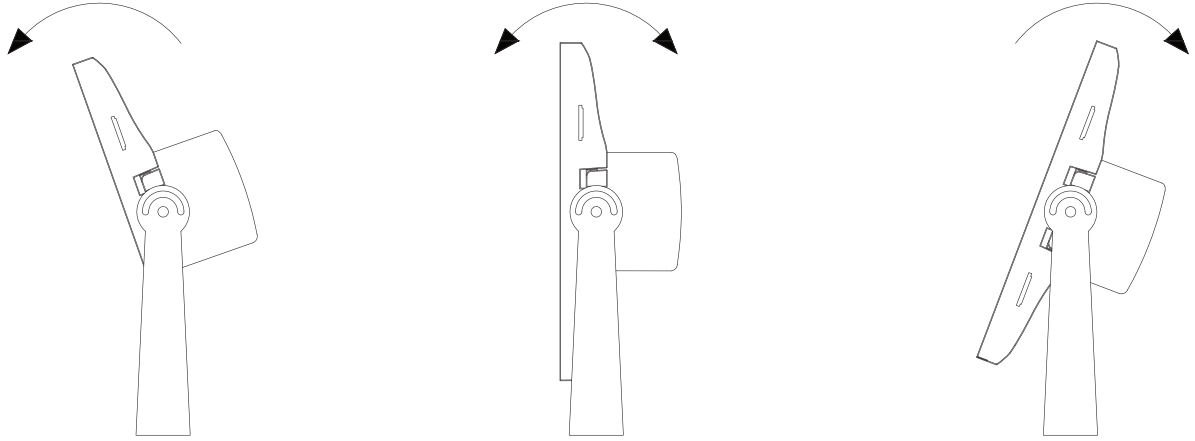

Heavy duty, slimline mounting bracket allows for 360 rotation of the lamp. Side locking bolts secure the exact angle.


Pressure Cast Aluminium Casting ADC12
Powder-Coated Finish




Options



Stainless Steel
Mounting Bracket

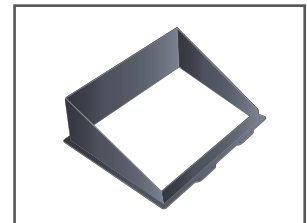

Half Glare Shield



Full Glare Shield



Driver and Electrical
Control Gear