



Evo SL Series

HIGH PERFORMANACE 200W LED FLOOD LIGHT

Technical Specification

- IP65 Waterproof, Dustproof
- High Corrosion Resistance
- Low Temperature Electronics
- Beam width 120°
- 50,000-hour lifecycle
- 270 Degree adjustment of lamp





LED

| Type: | |
|---------------------|--|
| Watts | 200W |
| Lumious Flux | 24000Lm |
| CCT | Standard 4000K (Options 3000K - 6000K) |
| Ingress Protection | IP65 |
| Impact Protection | IK09 |
| Dimension | L*W*H 330mm * 430mm * 54mm |
| Equivalent | 500W metal halide / HID lamp fixtures Equivalent |
| Working Temperature | - 45°C ~ 50°C |
| Power Factor | >0.95 |
| CRI | >80 |
| Life | 50,000+ Hours |
| Input Volage | 240V, 50/60Hz |



Evo SL Series

HIGH PERFORMANCE 200W LED FLOOD LIGHT

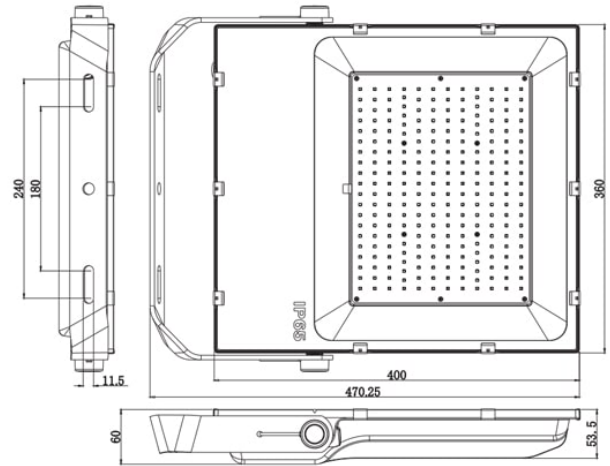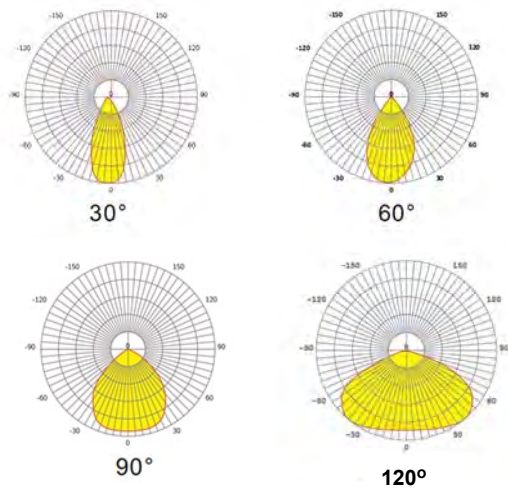

High Performance, Slim Line LED Flood Light



Mounting Bolt Cover



Ingress Protection 65



Cable Entry