


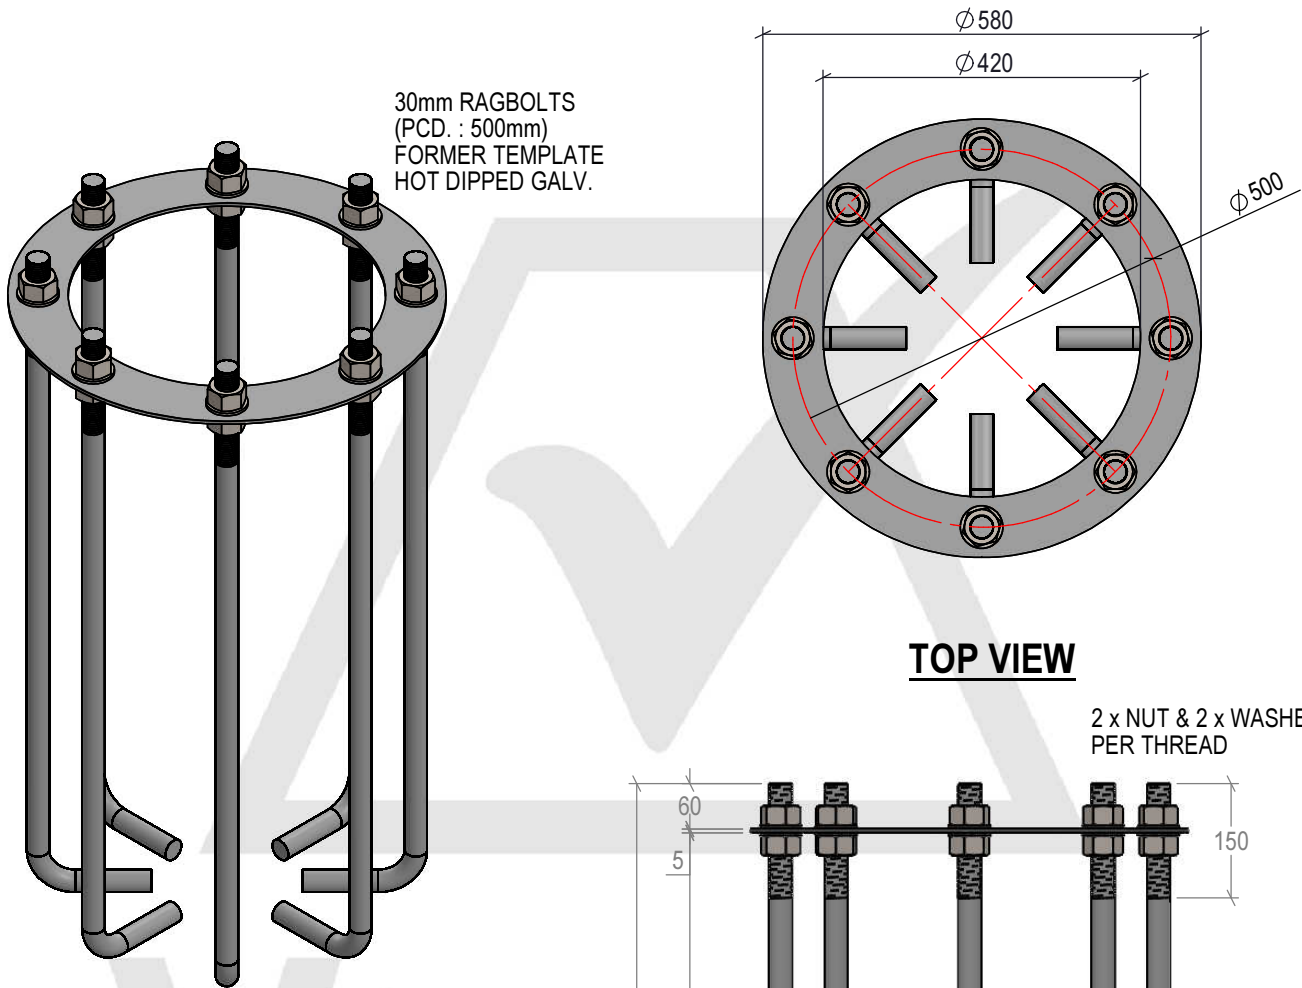

PICTORIAL VIEW

TOP VIEW

SIDE VIEW

STANDARDS

All products shall conform to the following Australian Standards:

- AS 1170.2 - Structural design actions - Wind actions
- AS 2159 - Piling - Design and installation
- AS 2870 - Residential slabs and footings - Construction
- AS 3600 - Concrete structures
- AS/NZS 4671 - Steel reinforcing materials
- AS/NZS 4600 - Cold-formed steel structures
- AS 3678 - Structural steel - Hot-rolled plates, floorplates and slabs
- AS 1554 (set) - Structural steel welding
- AS 4680 - Hot-dip galvanized (zinc) coatings on fabricated ferrous articles

Note :
This footing has been designed based on standard sandy soil conditions. Final concrete footing dimensions and reinforcement cage length may require adjustment depending on actual site soil classification.
Recommend concrete strength : 32 MPa.

 Vizona Vizona Pty Ltd 1300 250 150 info@vizona.com.au www.vizona.com.au	PROPRIETARY AND CONFIDENTIAL This drawing and the information contained herein are the exclusive property of Vizona Pty Ltd. Any reproduction, disclosure, or distribution—whether in part or in whole—without the prior written consent of Vizona Pty Ltd is strictly prohibited, except where such use is for the express purpose of preparing specifications, project documentation, or design briefs in connection with the intended use of the products by architects, engineers, or related professionals.		NAME	DATE	PART NUMBER : RBF-8M30-500	
			DRAWN	MANH P.	08.07.2025	TITLE : RAG BOLT & FORMER PLATE 30mm J BOLT 5mm thk SPACER
			CHECKED	BMS	09.07.2025	
			REVISED	GMC	09.07.2025	
	SCALE: AS SHOWN		COPYRIGHT This document is the intellectual property of Vizona Pty Ltd. It must not be copied, traced, reproduced, lent, or disclosed to any third party without the prior written consent of Vizona Pty Ltd, except where such distribution is necessary for professional design or project coordination directly relating to the intended application of the products described herein.			SIZE DWG. NO. REV. A4 VDWG-4006-R 1
PRODUCT FINISH: H.D.G (HOT DIPPED GALVANIZED)	PRODUCT WEIGHT: 65 kg.					
CUSTOMER APPROVAL :						
CUSTOMER NAME / PROJECT :		SHEET 1 OF 1				